


KIT-Z35-UD3 (CS-Z35UD3EAW + CU-Z35UBEA)



Descoperiți ultima generație de sisteme de aer condiționat

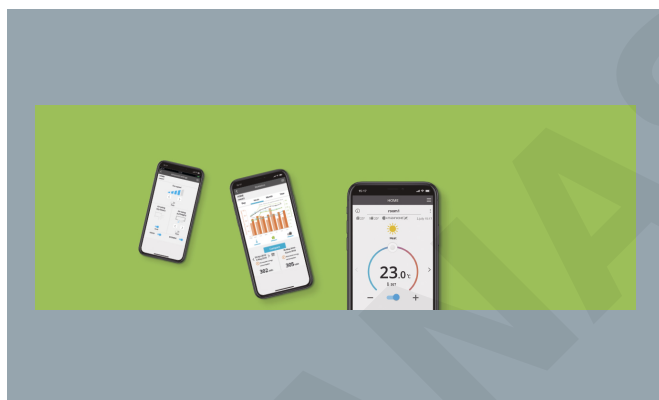

Panasonic Comfort Cloud. Control centralizat practic

[AFLAȚI MAI MULTE](#)



Noul control vocal

Control nelimitat și asistență cu mâinile libere pentru a avea acces complet la opțiunile aparatelor dvs. de aer condiționat.

[AFLAȚI MAI MULTE](#)

Low Static Pressure Hide Away Inverter • R32		
		3.5 kW
Kit		KIT-Z35-UD3
Cooling capacity (Nominal)	kW	3,50
Cooling capacity (Min)	kW	0,85
Cooling capacity (Max)	kW	4,00
EER (Nominal) (1)	W/W	3,85
EER (Min) (1)	W/W	3,54
EER (Max) (1)	W/W	3,36
SEER (2)		5,80 A+
Pdesign (cooling)	kW	3,50
Input power cooling (Nominal)	kW	0,91
Input power cooling (Min)	kW	0,24
Input power cooling (Max)	kW	1,19
Annual energy consumption cooling (3)	kWh/a	211,00
Heating capacity (Nominal)	kW	4,20
Heating capacity (Min)	kW	0,85
Heating capacity (Max)	kW	5,10
Heating capacity at -7°C	kW	3,00
COP (Nominal) (1)	W/W	3,82
COP (Min) (1)	W/W	3,70
COP (Max) (1)	W/W	3,59
SCOP (2)		4,10 A+
Pdesign at -10°C	kW	2,80
Input power heating (Nominal)	kW	1,10
Input power heating (Min)	kW	0,23
Input power heating (Max)	kW	1,42

Low Static Pressure Hide Away Inverter • R32		
		3.5 kW
Annual energy consumption heating (3)	kWh/a	956
Indoor unit		CS-Z35UD3EAW
External static pressure (Min) (7)	Pa	15
External static pressure (Max) (7)	Pa	45
Indoor power source	V	230
Indoor air flow (Cool)	m ³ /min	11,2
Indoor air flow (Heat)	m ³ /min	11,2
Moisture removal volume	L/h	2,0
Indoor sound pressure (Cool -Hi) (4)	dB(A)	33
Indoor sound pressure (Cool -Hi) (4)	dB(A)	33
Indoor sound pressure (Cool -Lo) (4)	dB(A)	27
Indoor sound pressure (Cool -Q-Lo) (4)	dB(A)	24
Indoor sound pressure (Heat -Hi) (4)	dB(A)	35
Indoor sound pressure (Heat -Lo) (4)	dB(A)	27
Indoor sound pressure (Heat -Q-Lo) (4)	dB(A)	24
Indoor dimension (Height)	mm	200
Indoor dimension (Width)	mm	750
Indoor dimension (Depth)	mm	640
Indoor net weight	kg	19
Outdoor unit		CU-Z35UBEA

Low Static Pressure Hide Away Inverter • R32		3.5 kW
Outdoor power source	V	230
Outdoor recommended fuse	A	16
Outdoor connection indoor / outdoor	mm ²	4 x 1,5 ~ 2,5
Outdoor air flow (Cool)	m ³ /min	34,3
Outdoor air flow (Heat)	m ³ /min	33,5
Outdoor sound pressure (Cool -Hi) (4)	dB(A)	48
Outdoor sound pressure (Cool -Hi) (4)	dB(A)	48
Outdoor sound pressure (Heat -Hi) (4)	dB(A)	48
Outdoor dimension (Height) (5)	mm	619
Outdoor dimension (Width) (5)	mm	824
Outdoor dimension (Depth) (5)	mm	299
Outdoor net weight	kg	35
Pipe diameter (Liquid)	Inch (mm)	1/4 (6,35)
Pipe diameter (Gas)	Inch (mm)	3/8 (9,52)
Pipe length range	m	3 ~ 20
Elevation difference (in/out) (6)	m	15
Pipe length for additional gas	m	7,5
Additional gas amount	g/m	10
Refrigerant (R32) / CO2 Eq.	kg / T	0,93 / 0,628
Operating range (Cool - Min)	°C	-10

Low Static Pressure Hide Away Inverter • R32		3.5 kW
Operating range (Cool - Min)	°C	-10
Operating range (Cool - Max)	°C	+43
Operating range (Heat - Min)	°C	-15
Operating range (Heat - Max)	°C	+24

Produce complementare

