


KIT-BZ35-ZKE (CS-BZ35ZKE + CU-BZ35ZKE)



Descoperiți ultima generație de sisteme de aer condiționat

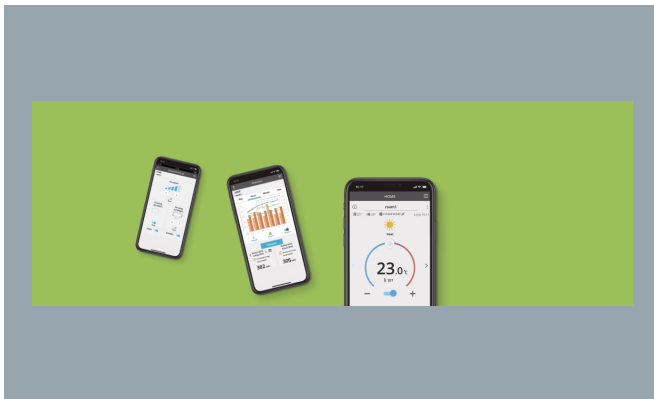

Panasonic Comfort Cloud. Control centralizat practic

[AFLAȚI MAI MULTE](#)



Noul control vocal

Control nelimitat și asistență cu mâinile libere pentru a avea acces complet la opțiunile aparatelor dvs. de aer condiționat.

[AFLAȚI MAI MULTE](#)

BZ super-compact · R32		
		3.30 kW
Kit		KIT-BZ35-ZKE
Cooling capacity (Nominal)	kW	3,30
Cooling capacity (Min)	kW	0,85
Cooling capacity (Max)	kW	3,90
EER (Nominal) (1)	W/W	3,24
EER (Min) (1)	W/W	3,54
EER (Max) (1)	W/W	3,05
SEER (2)		6,30 A++
Pdesign (cooling)	kW	3,3
Input power cooling (Nominal)	kW	1,02
Input power cooling (Min)	kW	0,24
Input power cooling (Max)	kW	1,28
Annual energy consumption cooling (3)	kWh/a	183
Heating capacity (Nominal)	kW	3,70
Heating capacity (Min)	kW	0,80
Heating capacity (Max)	kW	4,40
Heating capacity at -7°C	kW	2,60
COP (Nominal) (1)	W/W	3,72
COP (Min) (1)	W/W	4,10
COP (Max) (1)	W/W	3,49
SCOP (2)		4,20 A+
Pdesign at -10°C	kW	2,4
Input power heating (Nominal)	kW	1,00
Input power heating (Min)	kW	0,20
Input power heating (Max)	kW	1,26
Annual energy consumption heating (3)	kWh/a	800
Indoor unit		CS-BZ35ZKE
Indoor power source	V	230
Indoor recommended fuse	A	16
Indoor connection indoor / outdoor	mm ²	4 x 1,5
Indoor air flow (Cool)	m ³ /min	10,8
Indoor air flow (Heat)	m ³ /min	11,3
Moisture removal volume	L/h	1,9
Indoor sound pressure (Cool -Hi) (4)	dB(A)	38
Indoor sound pressure (Cool -Hi) (4)	dB(A)	38
Indoor sound pressure (Cool -Lo) (4)	dB(A)	30
Indoor sound pressure (Cool -Q-Lo) (4)	dB(A)	20
Indoor sound pressure (Heat -Hi) (4)	dB(A)	38
Indoor sound pressure (Heat -Lo) (4)	dB(A)	33
Indoor sound pressure (Heat -Q-Lo) (4)	dB(A)	25
Indoor dimension (Height)	mm	290
Indoor dimension (Width)	mm	779
Indoor dimension (Depth)	mm	209
Indoor net weight	kg	8
Outdoor unit		CU-BZ35ZKE
Outdoor air flow (Cool)	m ³ /min	31,1
Outdoor air flow (Heat)	m ³ /min	30,4
Outdoor sound pressure (Cool -Hi) (4)	dB(A)	48
Outdoor sound pressure (Cool -Hi) (4)	dB(A)	48

BZ super-compact • R32		3.30 kW
Outdoor sound pressure (Heat -Hi) (4)	dB(A)	50
Outdoor dimension (Height) (5)	mm	542
Outdoor dimension (Width) (5)	mm	780
Outdoor dimension (Depth) (5)	mm	289
Outdoor net weight	kg	25
Pipe diameter (Liquid)	Inch (mm)	1/4 (6,35)
Pipe diameter (Gas)	Inch (mm)	3/8 (9,52)
Pipe length range	m	3 ~ 15
Elevation difference (in/out) (6)	m	15
Pipe length for additional gas	m	7,5
Additional gas amount	g/m	10
Refrigerant (R32) / CO2 Eq.	kg / T	0,61 / 0,41
Operating range (Cool - Min)	°C	-10
Operating range (Cool - Min)	°C	-10
Operating range (Cool - Max)	°C	+43
Operating range (Heat - Min)	°C	-15
Operating range (Heat - Max)	°C	+24

Produse complementare

